



## Panel Features

Face Veneer	"B" grade Birch Veneer
Back Veneer	"B" grade Birch Veneer
Inner Plies	"C & Better" Larch Veneer
Resin	Phenolic Exterior Glue
Size	4'x8', custom sizes available
Thickness	3/8" to 1-1/8"
Edge Seal	Factory applied edge seal
Working Face	2 working faces
Stamp	Intertek USA Certification Mark
Standard Compliance	PS1-09, USA
Concrete Finish	Architectural matte finish

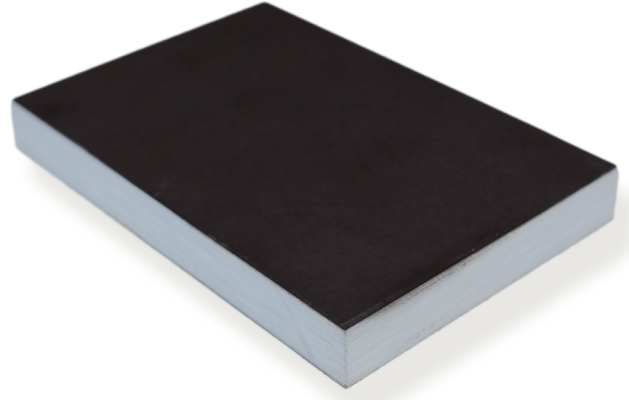

## 23/32" Phenolic Surface Film (PSF) G2S Structure & Overlay Description

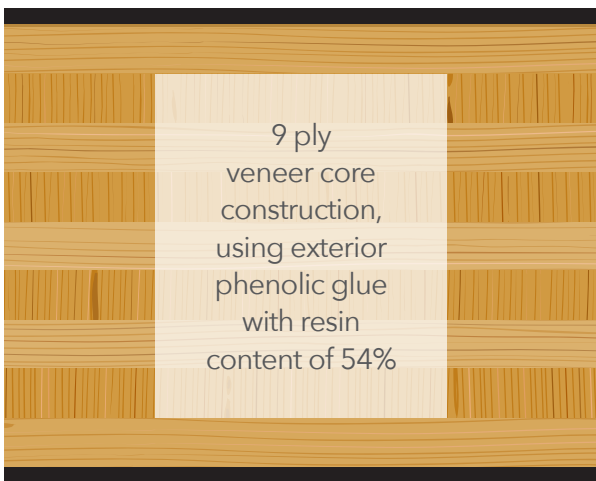

9 ply  
veneer core  
construction,  
using exterior  
phenolic glue  
with resin  
content of 54%

Face Overlay 160gsm or 240gsm  
Available in Black or Brown

### ATS Formply Overlay Features:

- > High wear resistance
- > Always a 2 sided product for increased number of uses
- > High opacity
- > Superior matte finish
- > No release agent required

Back Overlay 160gsm or 240gsm  
Available in Black or Brown